



GRAIN SPREADERS



SM



BROCK® GRAIN SPREADER

Brock's Grain Spreader Distributes Grain For Optimum Drying/Aeration Uniformity




Totally-enclosed C-face motor is mounted directly to an in-line gear reducer for no loss of horsepower and no belts to maintain or replace.

Wear plate (shown below) on motor end protects motor in grain flow.

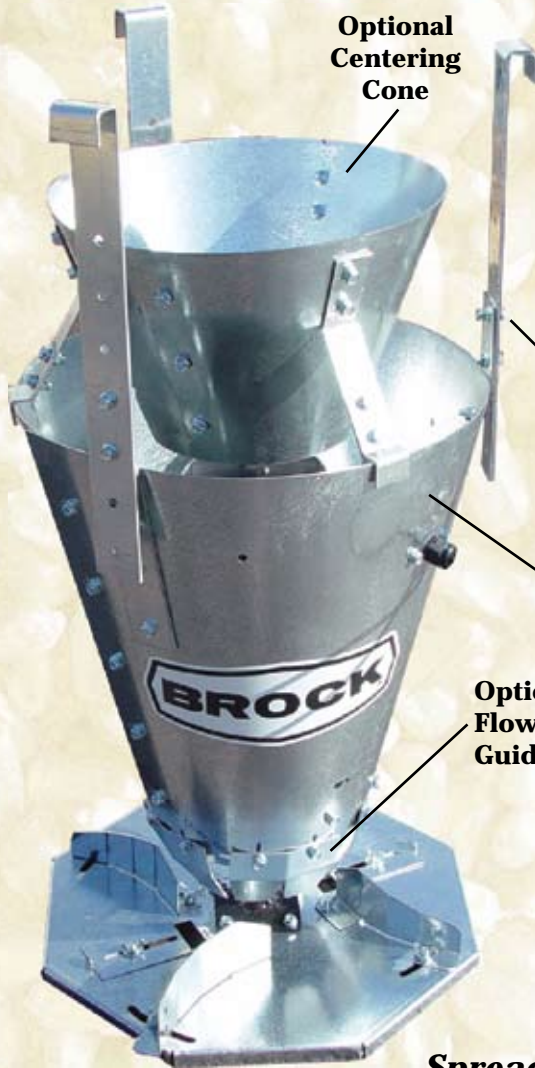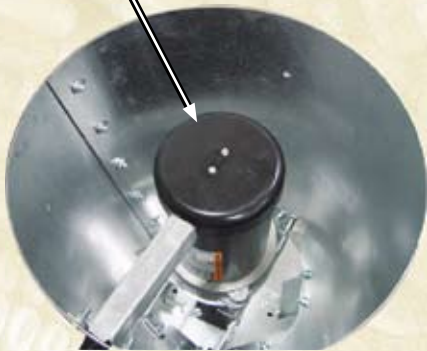

Optional Centering Cone

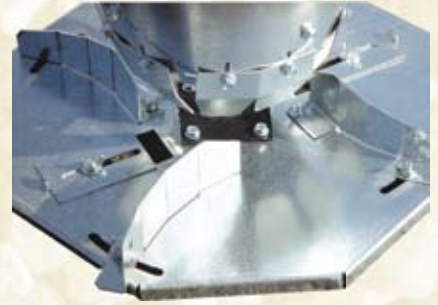

Spreader impellers can be adjusted to match the grain throw distance to the bin's diameter.

Adjustable Hanging Brackets allow a wide range of hanging heights and fill hole diameters.

Optional Flow Guides

Galvanized steel construction for durability and low maintenance.

Optional Centering Cone and Flow Guides (shown on spreader at left) are used in systems with a flow rate of less than 2,000 bushels per hour.

Spreader Specifications

Spreader Capacity (Bushels Per Hour)*

MODEL	CAPACITY	BIN DIAMETER
GS-3	3,000	24 to 48 Feet 7.3 to 14.6 m
GS-6	6,000	48 to 60 Feet 14.6 to 18.3 m

* Spreader capacity will vary depending on moisture and type of grain.

SPREADER MODEL	HP	PHASE	VOLTAGE	SPREADER WEIGHT	
GS-31	1/2	1	115	90 Lbs.	41 kg
GS-33	1/2	3	230 / 460	90 Lbs.	41 kg
GS-33-5	1/2	3	575	90 Lbs.	41 kg
GS-61	1-1/2	1	115	100 Lbs.	45 kg
GS-63	1-1/2	3	230 / 460	100 Lbs.	45 kg



Brock Grain Systems
Chore-Time Brock International
 Divisions of CTB, Inc.
 Milford, IN • Kansas City, MO • Frankfort, IN
 Phone: 574.658.4191 or +1.574.658.9323 (International)
 Internet: www.brockgrain.com or www.ctbworld.com
 E-Mail: brock@brockgrain.com