



- Horizontal and Inclined Conveyors
- 1,500 to 20,000 bushel/hr.
- Horizontal runs to 200 ft.

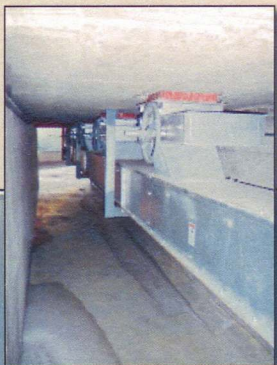

Drag Conveyor installation in a
trenched commercial bin floor.

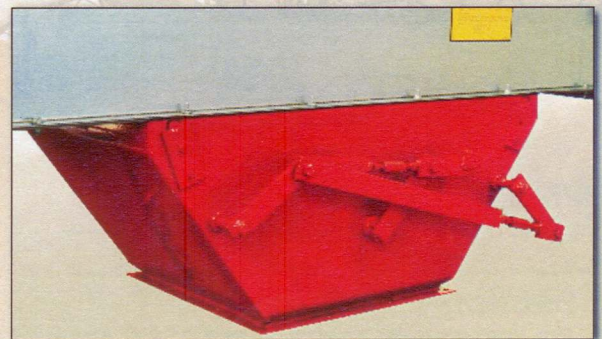


Drop Bottom Outlet



45° Elbow.

Inclined Conveyor
with By-Pass Inlet.

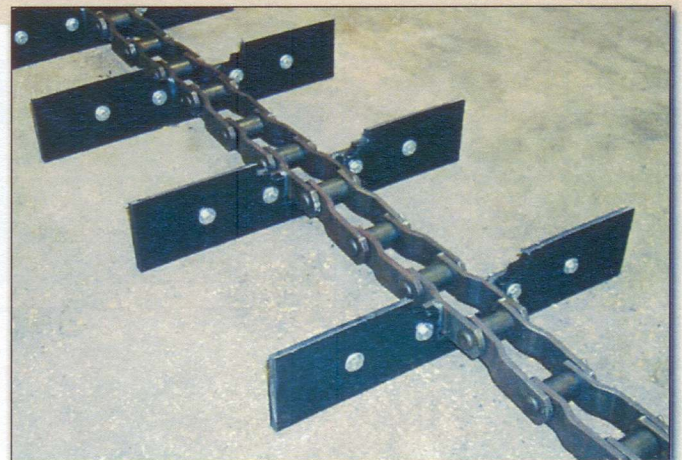

Tensile strength for conveyor chain ranges from
24,000 to 45,000 lb., depending on conveyor size.

